


MS-108-3



MS-108-3

Reed Sensor pitch 20.32 mm

Electrical Characteristics		@ 25 °C
Contact form		A
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	1
Carry current max.	A	1.2
Breakdown voltage min.	VDC	240
Total resistance max. (initial)	mΩ	100
Insulation resistance min.	Ω	10 ¹⁰

Features
➤ Mechanically protected
➤ Not ESD sensitive
➤ Various sensitivity ranges available
➤ Customized types available


Magnetical Characteristics (of unmodified Reed Switch)		@ 25 °C
Pull in range available	AT	10 - 25
Drop out min.	AT	4
Test coil	TC -	014
Test equipment tolerance	± AT	2

Approvals

Operating Characteristics (of unmodified Reed Switch)		@ 25 °C
Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	4000
Operate time max. (incl. bounce)	ms	1
Release time max.	ms	0.4

Environmental Characteristics		
Operating temperature	°C	-20 to + 85
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	100

Ordering Information	
Packing Unit	500 pcs
Weight per piece	0.42 g
Weight per package	255 g
Standard AT Ranges	
1	= 10 to 15 AT
2	= 15 to 20 AT
3	= 20 to 25 AT
4	= 25 to 30 AT

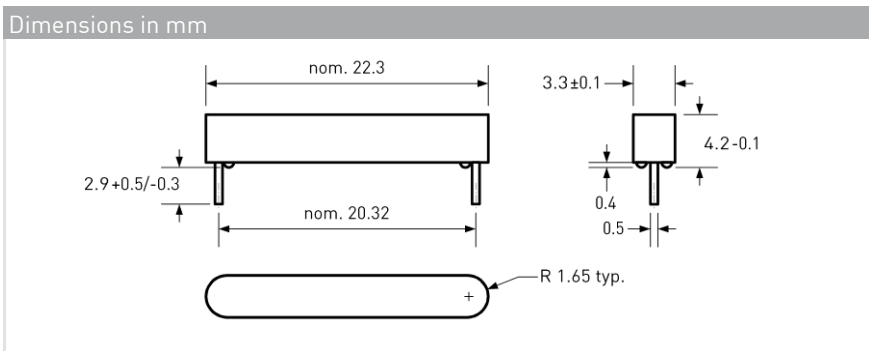

Ordering Example	
MS-108-3-1 describes MS-108-3 with 10 to 15 AT.	

Remarks
When mounted onto ferromagnetic parts switching distance of MS-108-3 may reduce. Electromagnetical influences and magnetic fields may change the switching behaviour of the sensor.

Material Information		
	Material	Colour
Housing	PA-GF	black
Potting compound	Epoxy	black

© PIC GmbH